


Evaporator Static





60 a 740 Kcal/h
81 a 861 Watts

Evaporator Static

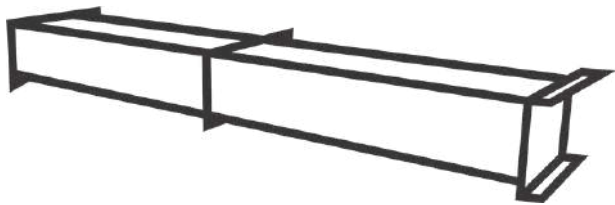


Benefits

- Available in horizontal and vertical versions
- Aluminum fins, spaced 3 to 10mm apart for greater thermal efficiency and reduced energy consumption
- Copper tubes with diameters of 1/2" or 5/8"
- Aluminum headers
- Every piece undergoes a pneumatic test process (30Kgf/cm²), washing, and final pressurization with nitrogen to ensure the absence of moisture and removal of solid and liquid impurities to levels compatible with refrigeration systems.

Technical details

- Differentiated spacing

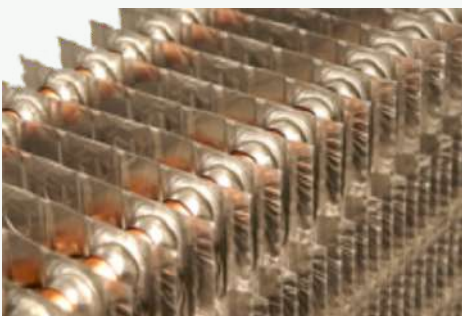

Applications

- Refrigerated counters and display cases for snack bars, bakeries, butcher shops, supermarkets, fish markets, etc

Aplicações



Meat



Dairy



Agribusiness



Beverages



Pharmaceutical




Food



Wholesale
and Retail

Supermarket Series and Horizontal


| Supermarket Series and Horizontal | Dimensional (mm) | | Counter temperature | Capacity Kcal/h (Counter lenght) | |
|-----------------------------------|------------------|-----|---------------------|-------------------------------------|------|
| | A | L | °C | 2m | 3m |
| 8T 5/8" | 100 | 200 | 0 | 1260 | 2100 |
| 10T 5/8" | 100 | 250 | 0 | 1500 | 2600 |
| 12T 5/8" | 100 | 300 | 0 | 1800 | 3000 |
| 14T 5/8" | 100 | 350 | 0 | 2100 | 3500 |
| 16T 5/8" | 100 | 400 | 0 | 2400 | 4000 |
| 18T 5/8" | 100 | 450 | 0 | 2700 | 3700 |
| 20T 5/8" | 200 | 250 | -20 | 2000 | 3300 |

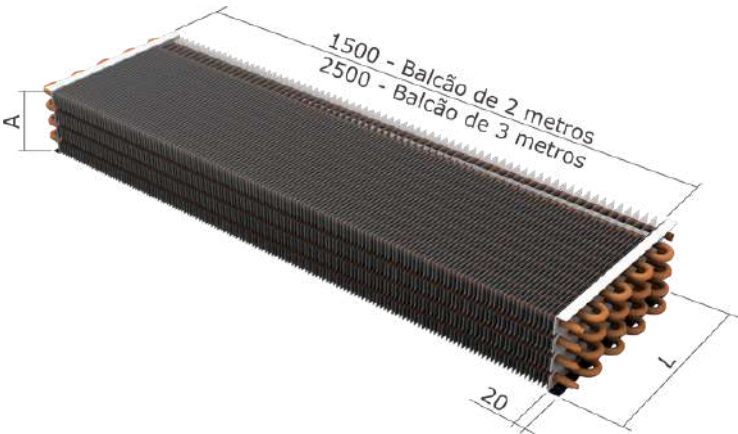

Spacing between fins of 10mm and tubes with 1/2" or 5/8" diameter

| | Dimensional | | | | Capacity Kcal/h |
|-------------------|----------------|-----|----------|-----|------------------|
| Horizontal Series | Headboard (mm) | | Fin (mm) | | (Counter lenght) |
| | A | L | A | L | Kcal/h |
| 8T 5/8" | 68 | 163 | 55 | 159 | 140 |
| 8T 5/8" | 77 | 170 | 63,5 | 165 | 165 |
| 8T 5/8" | 77 | 225 | 63,5 | 220 | 220 |


Vertical Series

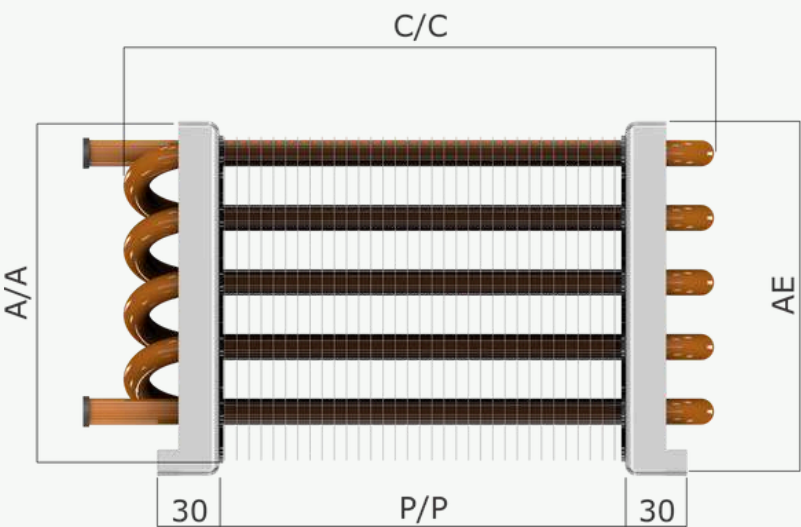

| Vertical Series 5/8 inch | AA | LA | P/P | AE | LE | C/C | Capacidade | Vertical Series 1/2 inch | AA | LA | P/P | AE | LE | C/C | Capacity |
|-----------------------------|-----|-----|-----|-----|-----|-----|------------|-----------------------------|-----|-----|-----|-----|-----|-----|----------|
| | mm | | | | | | Kcal/h | | mm | | | | | | Kcal/h |
| 6 tubos | 200 | 100 | 250 | 252 | 103 | 350 | 80 | 6 tubos | 191 | 83 | 250 | 242 | 93 | 350 | 60 |
| 8 tubos | 250 | 100 | 250 | 302 | 103 | 350 | 100 | 8 tubos | 254 | 83 | 250 | 305 | 93 | 350 | 80 |
| 10 tubos | 300 | 100 | 250 | 352 | 103 | 350 | 120 | 10 tubos | 318 | 83 | 250 | 369 | 93 | 350 | 100 |
| 12 tubos | 400 | 100 | 250 | 452 | 103 | 350 | 160 | 12 tubos | 381 | 83 | 250 | 432 | 93 | 350 | 120 |
| 14 tubos | 450 | 100 | 300 | 502 | 103 | 400 | 180 | 14 tubos | 445 | 83 | 300 | 496 | 93 | 400 | 160 |
| 16 tubos | 500 | 100 | 300 | 552 | 103 | 400 | 200 | 16 tubos | 508 | 83 | 300 | 559 | 93 | 400 | 190 |
| 18 tubos | 550 | 100 | 300 | 602 | 103 | 400 | 220 | 18 tubos | 572 | 83 | 300 | 623 | 93 | 400 | 210 |
| 20 tubos | 650 | 100 | 300 | 702 | 103 | 400 | 260 | 20 tubos | 635 | 83 | 300 | 686 | 93 | 400 | 240 |
| A200-12T | 400 | 100 | 350 | 452 | 103 | 450 | 200 | A200-12T | 381 | 83 | 350 | 432 | 93 | 450 | 160 |
| A300-14T | 450 | 100 | 350 | 502 | 103 | 450 | 250 | A300-14T | 445 | 83 | 350 | 496 | 93 | 450 | 190 |
| A400-14T | 450 | 150 | 460 | 502 | 152 | 560 | 450 | A400-14T | 445 | 110 | 460 | 496 | 123 | 560 | 380 |
| A500-16T | 600 | 150 | 460 | 652 | 152 | 560 | 540 | A500-16T | 635 | 110 | 460 | 686 | 123 | 560 | 480 |
| A600-18T | 650 | 200 | 460 | 702 | 203 | 560 | 740 | A600-18T | 635 | 165 | 460 | 686 | 183 | 560 | 700 |

Spacing between fins of 10mm. The stated capacity refers to an evaporating temperature of -10°

Evaporadores
ESTÁTICOS

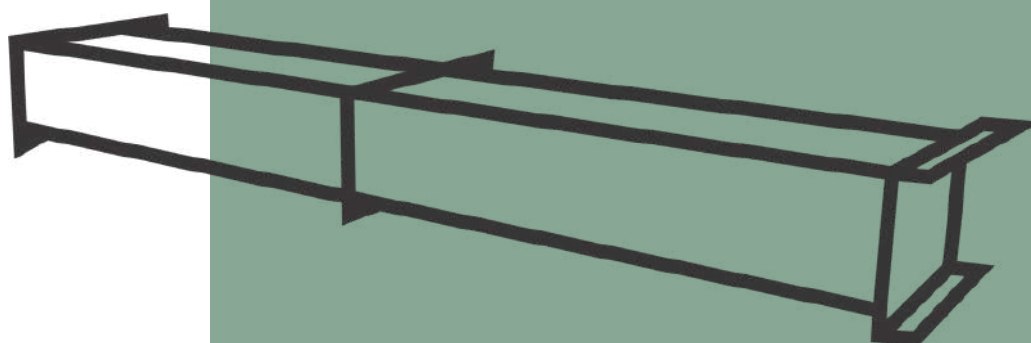


 mipal.com.br


 [mipal_evaporadores](https://www.instagram.com/mipal_evaporadores)

 [mipaloficial](https://www.facebook.com/mipaloficial)

 [mipal](https://www.youtube.com/mipal)

 [mipal](https://www.linkedin.com/mipal)

 +55 11 4409-0515

 11 97617-5467

Av. Engenheiro Afonso Botti, 240
Pinhal • Cabreúva • 13315-000

MIPAL
Technology and Trust

Mipal reserves the right to change the data presented in this catalog without prior notice. The photos presented in this catalog are for illustrative purposes only